

# Hydraulic Tail Lift Guide

How to use the OS1495 Autolift Onda OS Series

1

## Secure the vehicle

Apply the manual handbrake. If the minibus has an electric handbrake, ensure the ignition is switched off.



2

## Press the lift button

Switch on the tail lift button in the driver cabin.



3

## Turn the power key


Turn the red power key, located on the lift's power pack.



4

## Close the handle

Ensure the emergency release handle is in the closed position.

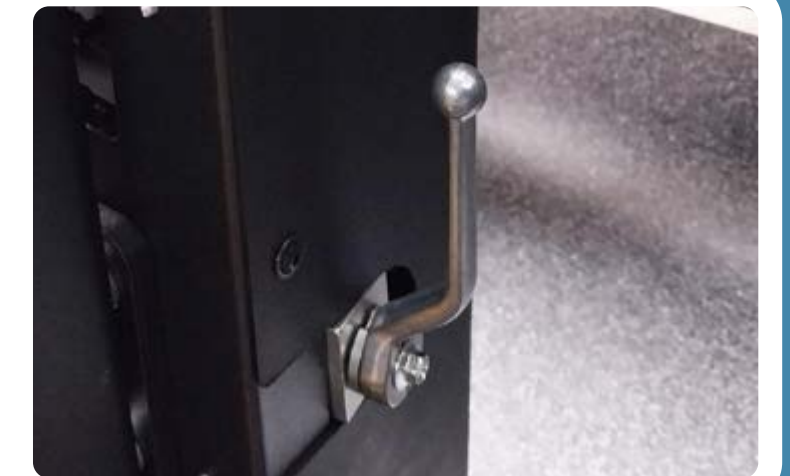

5

## Operate the lift

Follow the printed instructions on the lift mechanism to raise or lower the platform.



6

## Manual operation

You can also operate the lift without power, by attaching the handle and using a pumping action.

